



Complete power protection in less space for high density loads

Designed for high density critical loads, the MEPS P91 delivers industry leading reliability, efficiency and flexibility.

MEPS P91 can be configured for online or ECO mode operation for efficiency of up to 99%. Output voltage and frequency are programmable to meet a wide range of USA and international requirements.

PRODUCT SNAPSHOT

- › Available models: 5kVA/5kW, 6kVA/6kW, 10kVA/10kW
- › Tower, 2-post, and 4-post rack mounting configurations
- › Unity power factor
- › UL 1778, cUL, FCC, RoHS, CE, TAA compliant
- › 3 years electronics, 3 years battery warranty (USA and Canada)

FEATURES

Unity output power factor — MEPS P91 systems provide more real capacity for high density loads

Efficient operation — up to 94% online or 99% ECO mode efficiency lowers energy consumption

Hot swappable battery — MEPS P91 optional battery packs are easy to replace without interrupting the load

Isolation transformer — optional transformer provides 240/120 or 208/120V output

Multiple communications capability — RS-232, USB, and optional Web/SNMP, Modbus, Relay/dry contact cards

XBDM — optional input/output distribution, maintenance bypass switch, each output receptacle is protected by a breaker

\$50,000 load protection policy — protection against damaged connected equipment

MODEL SELECTION GUIDE


		MODEL NUMBER	MEPS P91-5K	MEPS P91-6K	MEPS P91-10K
CAPACITY	Power rating		5kVA (5kW)	6kVA (6kW)	10kVA (10kW)
INPUT	Voltage	110-300VAC*			
	Frequency	50/60Hz			
OUTPUT	Voltage	208/220/230/240VAC (208/120V or 240/120V with optional transformer)***			
	Frequency	50/60Hz ± 4Hz			
	THD (full load)	< 4%			
	Overload capacity	110% 10 min; 130% 1 min; > 130% 1 sec			
	Efficiency	Up to 94% online mode or 99% ECO mode			
BATTERY	Charger amps	1-4A			
	Nominal/float voltage	240/273VDC			
DIMENSIONS & WEIGHT	Dimensions (W x D x H)	17.2 x 23.6 x 3.5 in			
	Weight	33.1 lbs		39.7 lbs	
BYPASS DISTRIBUTION MODULE	Model	XBDM-P91A (5 or 6kVA)	XBDM-P91B	XBDM-P91C	XBDM-P91D
	Input connection	L6-30P with 6' cord		Terminal Blocks or optional line cord	
	Output connection	(2) L6-30R + (2) C19** each with breaker	Terminal block + L6-30R + (2) C19** each with breaker	Terminal block + L6-30R with breaker	(2) L6-30R each with breaker
ENVIRONMENT	Operating temperature	32-104°F (0-40°C)*			
	Audible noise	< 55dBA		< 58dBA	
	Altitude	11,500 ft above sea level			
APPROVALS	UL 1778, cUL, FCC, RoHS, CE, TAA complaint				
WARRANTY	3 years electronics, 3 years battery warranty (USA and Canada)				
COMMUNICATIONS INTERFACE	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, relay/dry contact, modbus)				
INCLUDED IN BOX	Software CD, horizontal brackets, tower pedestals, USB cable				
AVAILABLE OPTIONS	5 year extended warranty, 4-post rail kit, 2-post shelf kit, 2U/3U isolation transformer				

*Depending on load level. **Optional locking C20 dongles; L6-30R, L6-20R, 6-20R. *** MEPS P91 capacity derates to 90% at 208V output voltage.

BATTERY PACK DATA & RUNTIMES

		QTY	1kW	2kW	3kW	4kW	5kW	6kW	7kW	8kW	9kW	10kW
Model Number	BPXR2U240A	1 BP	53	27	15	11	7	5	4	4	3	2
Dimensions	17.2 x 27.4 x 3.5 in (2U)	2 BP	117	61	38	27	20	15	13	11	9	7
Battery Quantity/Type	(20) 12V 5AH Lead Acid	3 BP	171	100	62	43	33	27	22	18	15	13
Model Number	BPXR3U240A	1 BP	92	46	29	20	15	12	10	8	7	6
Dimensions	17.2 x 27.4 x 5.2 in (3U)	2 BP	182	106	66	47	36	29	24	20	18	15
Battery Quantity/Type	(20) 12V 580W Lead Acid	3 BP	287	151	107	76	58	47	39	33	29	25

Runtimes are shown in minutes and will vary based on battery age and site conditions.

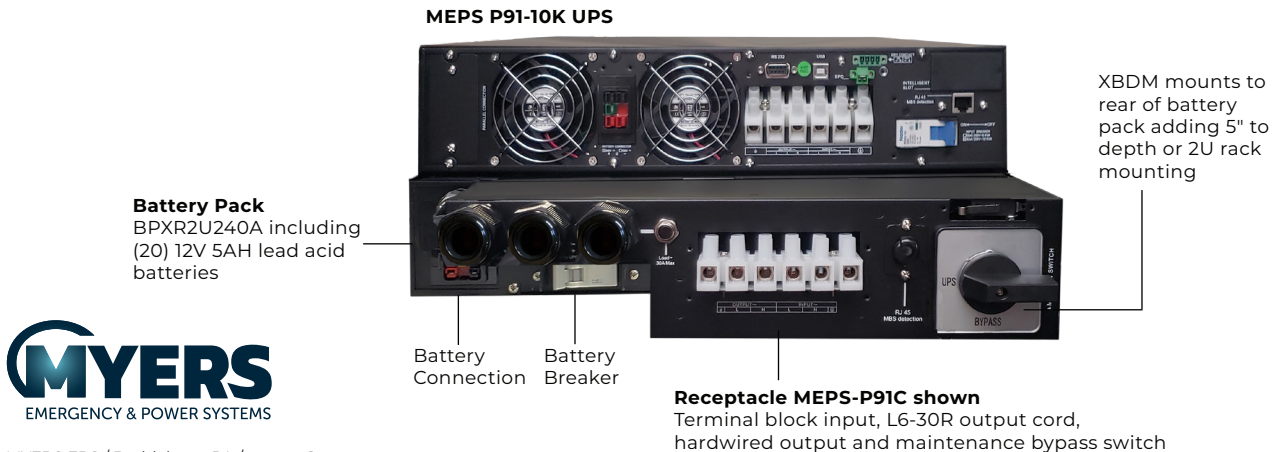

MYERS EPS / Bethlehem, PA / quotes@myerseps.com

www.myerseps.com

©2024 Myers Emergency Power Systems

All Rights Reserved. MEPS-P91-5kVA-10kVA (Rev 04/08/23)